

**WENBAO****温宝球阀 WENBAO BALL VALVE**  
OUR PHILOSOPHY IS SIMPLY TO SUPPLY THE BEST  
WENBAO QUALITY ACHIEVEMENT FOR FUTURE

## ANSI 2PC Flanged Ball Valve with mounting pad


## Material



ITEM	DESIGNATION	MATERIAL
1	CAP	304/316/WCB
2	NUT	ASTM 194-B8
3	BOLT	ASTM 194-B8
4	GASKET	PTFE
5	BODY	304/316/WCB
6	BALL	304/316
7	SEAT	PTFE
8	THRUST WASHER	PTFE
9	STEM	304/316
10	PACKING	PTFE
11	GLAND	304
12	STEM NUT	304
13	SPING WASHER	304
14	HANDLE	304

### FEATURES:

- FACE TO FACE DIMENSIONS: ANSI B16.10-1992
- END FLANGED DIMENSIONS: ANSI B16.5
- DESIGN: ANSI 16.34, API608
- TEST: API598, API6D
- INVESTMENT CASTING BODY
- LEVER OPERATED WITH DIRECT MOUNTING PAD

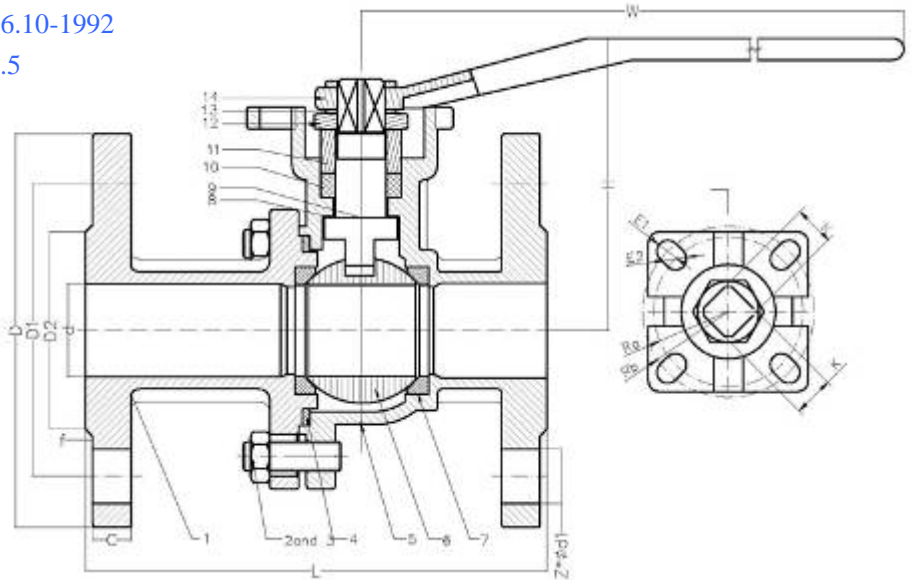

<b>SHELL (BY WATER)</b>		<b>PN1.6MPa</b>
		<b>32kg/c m<sup>2</sup></b>
<b>SEAT</b>	<b>BY WATER</b>	<b>315PSI</b>
		<b>22 kg/c m<sup>2</sup></b>
	<b>BY AIR</b>	<b>80PSI</b>
		<b>6 kg/c m<sup>2</sup></b>

## Dimension

ITEM \ SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
d	15	20	25	32	40	50	65	80	98
L	108	117	127	140	165	178	190	203	229
H	85	90	100	105	110	120	160	170	185
W	160	160	160	160	206	206	324	324	324
D	89	98	10	8117	127	152	178	190	229
D1	60.50	70	79.5	89	98.5	120.5	139.5	152.5	190.5
D2	35	43	51	64	43	92	702	127	157
c	11	11	12	13	15	16	18	19	24
f	2	2	2	2	2	2	2	2	2
z*d1	4*16	4*16	4*16	4*16	4*16	4*19	4*19	4*19	8*19
E2	3	3	3	3	3.5	3.5	3.5	4.5	4.5
E1	3	3	3.5	3.5	4.5	4.5	4.5	5.5	5.5
Ra	18	18	21	21	25	25	25	35	35
Rb	21	21	25	25	35	35	35	51	51
K	9	9	11	11	14	14	14	19	19